
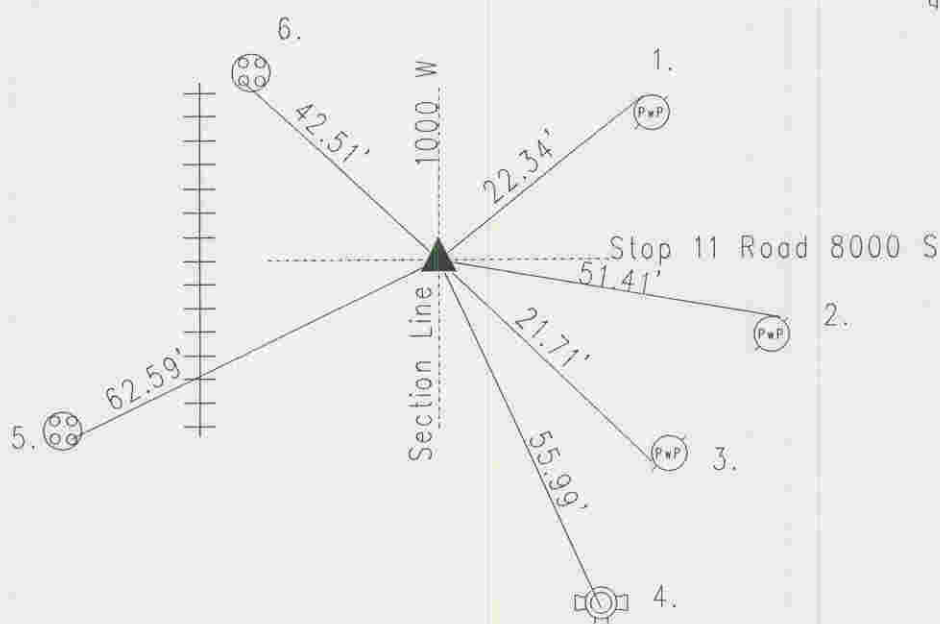


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 23 TOWNSHIP 14 RANGE 3
DATE: 8-29-05
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 10-1-98
EDM ties
IN. S.P.C. E ZONE NAD '83
NAME: 14032301
N: 488715.3229(m)
E: 56151.4712(m)

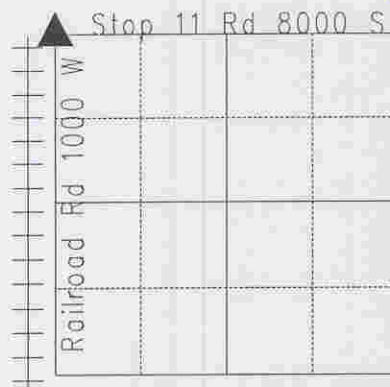

Original post set 1820 by Laughlin with witness: 10" ash N 57 W 44 links, 12" dogwood S 85 E 62 links per Marion County Atlas pg. 5. No mention of stone or witness per Perry Township Legal Survey Book. Monroe 4-20-53 called a new stone over old stone. McLannd 4-17-70 called railroad spike over stone. Miller 6-27-75 called same. Greene 1-2-86 called railroad spike. Kiste 7-13-92 called same. Wilcoxon 9-17-92 found railroad spike 4" down. Another railroad spike 10" down directly under previous stone. Stone found 18" down. Harrison set. Re-tied 10-1-98 by Kiste. Re-tied 8-29-05 by Wilcoxon.

14032301

REF.	DISTANCE	DESCRIPTION
1.	22.34'	Mag nail w/brass washer NW PwP#825-1083 24" up
2.	51.41'	Mag nail w/bw NF PwP#59-784 12"up
3.	21.71'	Mag nail w/bw SW PwP#75-784 10"up
4.	55.99'	Top nut of fire hydrant
5.	62.59'	Cut 'x' SF bolt of railroad crossing sign base
6.	42.51'	Cut 'x' SW bolt of railroad crossing sign base